

The application was originally made under the Patent Cooperation Treaty with the Soviet Union Patent Office acting as the receiving office on (86) 30 May 1980, being given an application number PCT/SU80/00085. The application was searched by the Soviet Union Patent Office acting as the International Search Authority (ISA), and published by the International Bureau on (87) 10 Dec 1981 under serial number WO81/03590 in the Russian language. The text of the application is contained in the publication made by the International Bureau as above identified. The accompanying text being an English translation thereof.

(12) UK Patent Application (19) GB (11) 2 090 490 A

(21) Application No 8202433

(22) Date of filing
30 May 1980

(43) Date of issue
7 Jul 1982

(51) INT CL³ (AS GIVEN BY
ISA) H03K 13/02

(52) Domestic classification
H3H 12D 13D 14A 14D
6A 6D 7B 7F 8G 8X BA

(56) Documents cited by ISA
FR A1 2017371
DE B1 1195804
FR A1 2413823

(58) Field of search by ISA
INT CI H03K 13/02
INT CI² H03K 13/02
GERMAN 21a 36/00
US 340-347
FR Gr XII C17
GB 40(6)T; H3P K
CH 66c
CA 324
AT 21e
AU 04.6


(71) Applicant
Vinnitsky
Politekhnicheskoy
Institut
Vinnits A Khmel'nitskoy
Shosse 133
USSR

(72) Inventors
Aleksei Petrovich
Stakhov
Aleksei Dmitrievich
Azarov
Vyacheslav Ivanovich
Moiseev
Yury Nikolaevich
Uzhvak
Viktor Petrovich
Verkhovoi

(74) Agents
Marks & Clerk
57-58 Lincolns Inn
Fields
London WC2

(54) Converter of P-codes into analog values

(57) A converter of P-codes into analog values comprises key elements (1) and an adder (2) of standard analog values, the output of which is the output of the converter. The converter is provided with a code sweep unit (5), a unit (6) for differential discrimination in the levels of the output signal, a unit (7) for storage of defective bit numbers and a unit (8) for identifying the type of sweeping. The converter further comprises a control unit (9) ensuring the required interaction of said units during a prescribed mode of action. Said units are interconnected so as to determine the defective bit numbers with a "precision" of up to one bit.

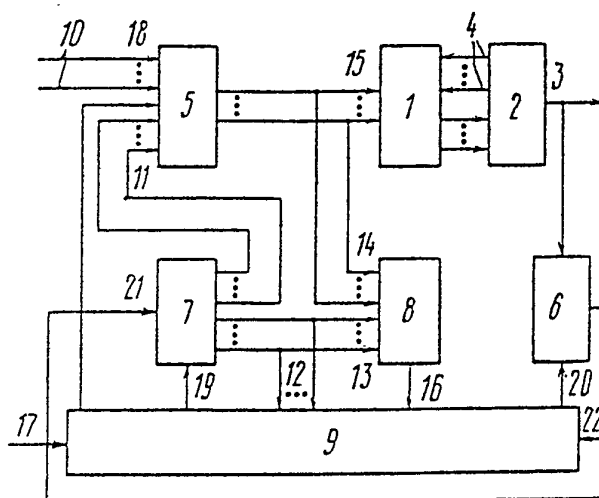

GB 2 090 490 A